

INVO Eco LED High Bay

Our INVO Eco range of LED High Bay fittings offer cutting edge modular design with pure aluminium extrusion heatsink which comes with excellent heat dissipation and anti-corrosion capacity.

The lens are hot swappable, this means that with no tools, you can slide out the lens and change the angles, therefore should the tasks below the light change it is easy to change the light angles.

Toolless entry means modules such as emergency kit or sensor control can be added easily if required.

Universal mounting options: hanging chain, surface mount and pole mount.

- > Replace HID High-Bay or Low-Bay
- > Emergency backup version available
- > Super efficient 140lm per watt +
- > Available with a complete range of sensors
- > Available in 75W, 100W, 150W, 200W
- > Optional wire guard protected
- > Optional Adjustable hanging kit or surface mount kit
- > Input voltage of 100-277V AC 50/60Hz



| Specification | PD-INVO-TR75W | PD-INVO-TR100W | PD-INVO-TR150W | PD-INVO-TR200W |
|---------------|----------------|----------------|----------------|----------------|
| Power | 75W | 100W | 150W | 200W |
| Power Factor | >80 | >80 | >80 | >80 |
| Lumen | 10650lm | 14100lm | 21750lm | 29000lm |
| Beam angle | 90° or 120° | 90° or 120° | 90° or 120° | 90° or 120° |
| CCT | 4000K or 5000K | 4000K or 5000K | 4000K or 5000K | 4000K or 5000K |
| Dimension | 577×254×59mm | 577×254×59mm | 577×254×59mm | 1094×254×59mm |


For more information, or to book your FREE audit, call us on 01522 595 858, email enquiries@invodirect.co.uk or visit us at www.invodirect.co.uk

INVO Eco Sports LED High Bay

Our INVO Eco Sports range of LED High Bay are designed for high impact sporting environments. Using super durable TGIC paint material, this light can resist all tough weather conditions whilst providing optimal colour maintenance, ensuring it is ideal for lighting outdoor sports fields as well as sports halls. The protective lens ensures the fitting is impact resistant. This lightweight fitting can be mounted on a adjustable bracket or hanging rope.

The fitting can be produced at 60, 90 or 120 degree angle of light to best support your application.

- > Suitable for high impact sporting environments
- > Available in 4000K or 5000K CCT
- > Market leading 150 lumen per watt output
- > Universal mounting options – adjustable bracket or hanging chain
- > Lightweight at just 6KG

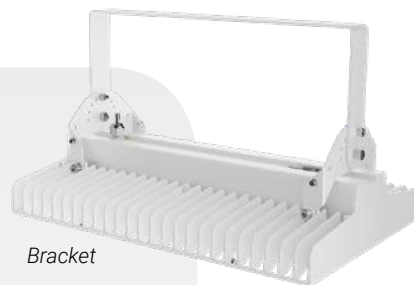


Bracket



Hanging rope



Temper glass

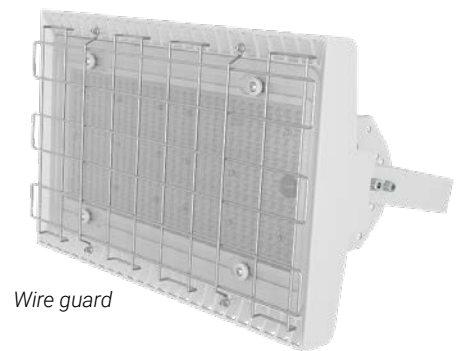

Wire guard

| Specification | PD-INVO-SH100W | PD-INVO-SH150W | PD-INVO-SH200W |
|---------------|----------------|----------------|----------------|
| Power | 100W | 150W | 200W |
| Input voltage | 200-305V | 200-305V | 200-305V |
| Lumen | 15,000 | 22,500 | 30,000 |
| Beam angle | 60/90/120 | 60/90/120 | 60/90/120 |
| CCT | 4000K/5000K | 4000K/5000K | 4000K/5000K |
| Dimension | 560x410x210mm | 560x410x210mm | 560x410x210mm |

For more information, or to book your FREE audit, call us on 01522 595 858, email enquiries@invodirect.co.uk or visit us at www.invodirect.co.uk